Oracle

LAINOX®

ORACGS

HIGH SPEED OVEN - ALL IN ONE. COMBI WAVE / HIGH SPEED OVEN - STANDARD VERSION (STEEL)

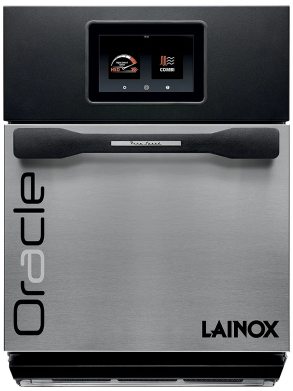

High Speed Oven

Combi Wave

Features

HIGH SPEED OVEN
An operating mode that simultaneously uses convection, microwave and impingement modes, with temperatures from 100°C to 300°C.

COMBI WAVE
In Combi Wave mode, Oracle can be used as a convection oven with temperatures from 30°C to 300°C, as a microwave oven with power up to 2000 W or with a combination of the two cooking methods to achieve results that always exceed expectations.

CONNECTED
Oracle connects free-of-charge to Lainox's Nabook plus portal via the standard- supply Wi-Fi and ethernet features giving you a 4.0 kitchen (find out more on nabookplus.cloud).

OOS - ORACLE ODORLESS SYSTEM
A labyrinth baffle catalyst filter containing platinum particles which help to reduce steam, odours and grease residue during cooking. The Oracle Odorless System does not require any cleaning or routine maintenance work. Its efficiency is always guaranteed.

FAST COOKING SYSTEM
Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for high-speed cooking in High Speed Oven mode.

MICROWAVE COOKING SYSTEM
Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for cooking in Combi Wave mode.

OWB - ORACLE WASHABLE BOX
A special Teflon oven chamber which can be removed and washed for the next round of cooking, making the cleaning procedure fast and cost-effective.

CE EMC CB IPX3 EAC UK CA

Capacity

Capacity	17,9 lt.

Dimensions

Width	*mm*	467	*inch*	18.4
Depth	*mm*	609	*inch*	24.0
Height	*mm*	630	*inch*	24.8
Maximum outer width	*mm*	467	*inch*	18.4
Max exterior depth	*mm*	657	*inch*	25.9
Maximum exterior height	*mm*	630	*inch*	24.8
Packaging width	*mm*	600	*inch*	23.6
Packing depth	*mm*	800	*inch*	31.5
Packaging height	*mm*	800	*inch*	31.5
Net weight	*kg*	61	*lbs*	134.5
Gross weight	*kg*	73	*lbs*	161.0
Volume	*m3*	0.18	*ft3*	6.4
Packing volume	*m3*	0.38	*ft3*	13.4
Cooking compartment width	*mm*	310	*inch*	12.2
Cooking compartment depth	*mm*	320	*inch*	12.6
Cooking chamber height	*mm*	180	*inch*	7.1
Support base width	*mm*	426	*inch*	16.8
Support base depth	*mm*	510	*inch*	20.1
Power plug configuration		CEE 7 / 7 Schuko		
Cable length	*m*	2	*ft*	6.56

Technical Data

Working temperature	*°C*	High Speed Oven: 100 / 300 °C - Combi Wave: 30 / 300 °C	*°F*	NaN

Power supply

Power supply voltage		1N-AC 230 V
Electrical absorption	*A*	16
Frequency	*Hz*	50
Total electric power	*kW*	3,3
Microwave	*kW*	1
Impingement	*kW*	3

OPTIONAL ELECTRIC CONFIGURATION, WITHOUT EXTRA CHARGE - TO BE REQUESTED WHEN ORDERING

Option code	Connection plug (Plug provided)	Cable length (Provided - mt.)	Power supply voltage	Frequency Hz	Total electric power kW	Total electric power A	Power output - kW Impingement	Power output - kW Microwave	Country
OR3092	IEC 309	2	1N-AC 230 V	50	3,6	16	2,8	1	EU
OR1240	-	2	1N-AC 240 V	60	3,6	16	2,8	1	KSA/KO/LATAM
OR1208	-	2	1N-AC 208 V	60	3,6	16	2,8	1	LATAM
OR1363	BS1363/A	2	1N-AC 230 V	50	2,8	13	2,8	1	UK
OR53112	A53112	2	1N-AC 230 V	50	3,3	15	2,8	1	AUS

AUS Australia	**EU** Europe	**KO** South Korea	**KSA** Kingdom of Saudi Arabia	**LATAM** Latin America	**UK** United Kingdom

HOW TO USE

- Programmable mode: possibility of programming and storing a recipe with its cooking procedures in automatic sequence.
- High Speed Oven. - FCS (Fast Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, method and automatic cooking program. - Manual mode with instant start.
- Combi Wave. - MCS (Microwave Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, procedure and automatic cooking program. - Manual mode with three instant start cooking methods: convection, microwave or combined convection + microwave.

CONNECTIVITY

- Nabook Plus - Thanks to the Cloud feature, it is possible to access Nabook Plus, the virtual kitchen assistant (read more on nabookplus.cloud, free registration).
- Recipe creation including ingredients with procedure and photo.
- Direct access by Oracle to the recipe database with download option (patented).
- Synchronisation of multiple Oracle ovens connected to the same account (patented).
- HACCP Monitoring.
- Remote diagnosis through the Nabook plus portal by the LAINOX Service Center.
- Automatic software update notification system.
- Possibility to download recipes from the Nabook Plus portal based on country.
- Possibility to run automatic software updates on multiple devices simultaneously.
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4 GHz) standard.

CONTROL MECHANISMS

- Automatic fan speed for High Speed Oven mode.
- Possibility of choosing the fan speed.
- USB connection to download HACCP data, update software and upload/download cooking recipes.

STRUCTURAL CHARACTERISTICS

- Pull-down door with ergonomic handle.
- Perfectly smooth room.
- Integrated catalyst filter for operation without hood.
- The door slides under the oven cooking surface, allowing the food to removed safely without the risk of burns.

OPERATION

- Display that can be configured based on the needs of the user, bringing forward the programmes used most.
- Organisation of recipes in folders with preview, giving each folder its own name.
- High-definition 7-inch capacitive LCD color screen with choice of "Touch Screen" functions.
- User interface with a choice of 29 languages.
- Starting an automatic "One Touch" cooking.
- Possibility of preheating the cooking chamber up to 300°C.
- Rapid cooling of the cooking chamber with open door.
- There are about 30 recipes available in Oracle and a growing number of alternative ones are available via access to the Nabook plus portal. Each recipe has been tested to guarantee best results.
- Oracle coach. Virtual assistant that provides advice on using Oracle and informs when maintenance is needed.

SAFETY FEATURES

- Door open/closed electronic sensor.
- Self-diagnosis with smart error viewing.
- Max 65°C external temperature on the door panel.
- Compliant with the IEC60335-1, IEC60335-2-90 and EMC international standards.

CLEANING AND MAINTENANCE

- OWB - Oracle Washable Box. special removable and washable box chamber.
- Easy external cleaning thanks to the perfectly smooth surfaces and IPX3 protection rating against water spray.

INSTALLATION AND ENVIRONMENT

- 100% recyclable packaging.
- Product recycling rate: 90%.
- Quality ISO 9001 / Safety ISO 45001 / Environmental ISO 14001 certification.

STANDARD EQUIPMENT

- Ethernet connection
- Aluminium peel (190 x 330 x 50 mm)
- Oracle Washable Door Cover. Removable and washable inner door protection
- Electric plug
- Power cable - 2 m
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4GHz) standard
- Oracle Washable Box
- Anodized aluminum alloy plate
- USB connection

OPTIONAL TO BE REQUESTED WHEN ORDERING

OR3092: Optional electric configuration, without extra charge. 1N-AC 230 V - 50 Hz. Plug included (IEC 309 - 3p)
OR1240: Optional electric configuration, without extra charge. 1N-AC 240 V - 60 Hz. Plug not included
OR1208: Optional electric configuration, without extra charge. 1N-AC 208 V - 60 Hz. Plug not included
MPACK: Multipack packaging - 6 pcs mixed in a single package - 1200 x 800 x 2170 h - 415 kg - 2,08 m3. Not compatible with optional SOPPRS
SOWBHD: Extra charge for Oracle Washable Box Heavy Duty version OWBHD. Replaces the standard model
SOPPRS: Panini Stone Press kit (consisting of Panini Stone Press OPPRS - dedicated Oracle Washable Box OWBPRS - special paddle OPFAPRS) + preparation on the oven. Oracle Washable Box standard excluded from standard equipment. Not compatible with MPACK multipack packaging
OR1363: Optional electric configuration, without extra charge. 1N-AC 230 V - 50 Hz. 1N-AC 240 V - 50 Hz. Plug included (BS1363/A)
OR53112: Optional electric configuration, without extra charge. 1N-AC 230 V - 50 Hz. 1N-AC 240 V - 50 Hz. Plug included (A53112)

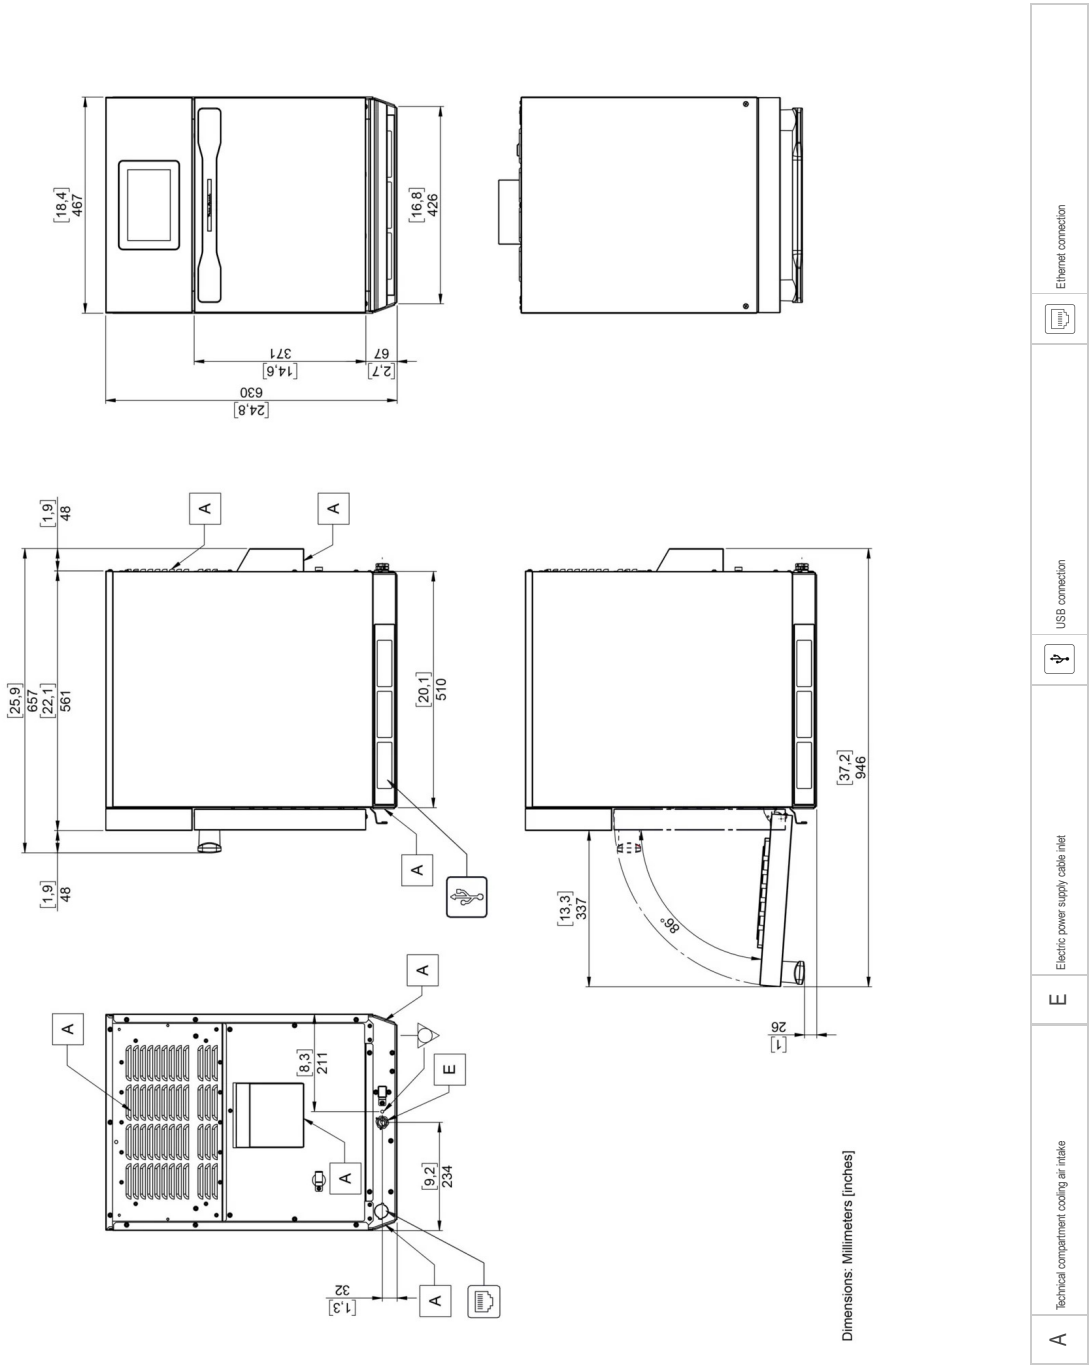

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice

LAINOX

LAINOX ALI Group Srl
Via Schiaparelli 15
Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) · Italy

Tel +39 0438 9110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com